


27 SPOOLS FOR 3D-PRINTER

Spools for consumables for 3D printers, from 250 g spools to 4 kg spools. Standard mount of 52 mm in diameter

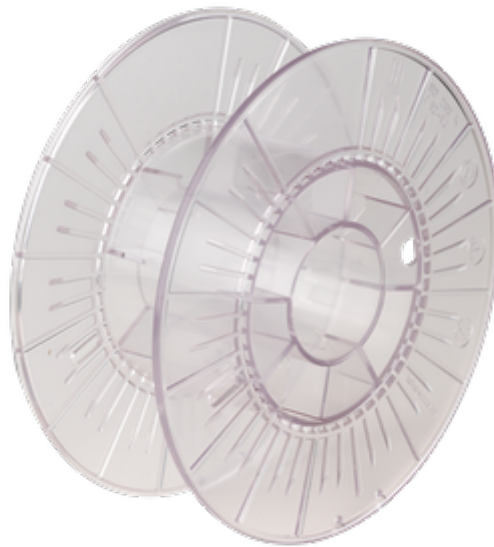

Designation	Flange Ø	Barrel Ø	Central bore Ø	Width	Winding width	Flange thickness	Winding- volume	Central bore Ø	Drive- hole/pin	Drive- distance
	d1 [mm]	d2 [mm]	d3 [mm]	L1 [mm]	L2 [mm]	S [mm]	V [cm³]	tapered part d4 [mm]	d5 [mm]	E1 [mm]
Reel SD 100/40 K	100	38	16.5	45	38.5	3.2	258			
Reel SD 100/60 K	100	57	16.5	45	38.5	3	204			
Reel HD 135/16,5	135	57	16.5	49	43	3	505			
Reel HD 150/19-100	150	55	19.3	100	94	3	1427		1x9	19
Reel HD 200/52-74	200	105	50.5	74.4	70	2.2	1592			
Reel SD 200 K	200	105	50.5	55	45	5	1024		1x10	44.5
Reel SD 200/50,5-53 K	200	105	50.5	53	45	3.8	1024		1x10	44.5
Reel SD 200/52-43 K	200	105	50.5	43	35	4	796		1x10	44.5
Reel SD 200/52-80 K	200	105	50.5	80	70	5	1592		1x10	44.5
Reel SD 300 K	300	212	51.5	103	91	6	3220		1x10	44.5
Reel SD 300/20 K	300	180	51.5	103	85	9	3845		1x10	44.5
Reel L 315/36-212	315	125	36	212	200	6	13131			
Reel SD 350 K AW	350	212.5	51.7	103	89.9	6.6	5461		1x11	44.5
Reel LE 355	355	180	36	167	142	12.5	10441			
Reel HS 400 / 395/60-185	395	180	60	185	145	20	14079		2x16	71

Designation	Flange Ø	Barrel Ø	Central bore Ø	Width	Winding width	Flange thickness	Winding- volume	Central bore Ø tapered part	Drive- hole/pin	Drive- distance
	d1 [mm]	d2 [mm]	d3 [mm]	L1 [mm]	L2 [mm]	S [mm]	V [cm³]	d4 [mm]	d5 [mm]	E1 [mm]
Reel HS 401 / 395/60-280	395	180	60	280	240	20	23303		2x16	71
Reel USR 395	395	175	36 - 100	280	120 - 300	20	11818 - 29546		1x32,5	85.4
Reel HS 600 / 595/80-500	595	350	80	500	430	35	78190		1x40	99
Reel HS 601 / 595/80-500	595	250	80	500	430	35	98454		1x40	99

TECHNICAL DRAWING

Spools

